


DATA SHEET WEEPRO OVERBOOTS WITHIN ANTI SLIP SOLE

REF : WL-CBE/NAD-00

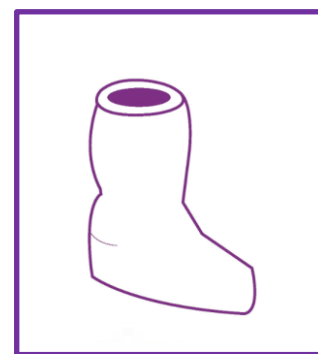

FEATURES: Microporous Film Over boots. Elasticated at top.

FABRICS AND SEAMS: White Microporous film 65^{GSM}. Serged internal seams

PHYSICAL PERFORMANCE

Fabric Physical Properties	Test Method	Résultats	Class
Abrasion resistance	EN530	>500 cycles	Class 3
Flex cracking	ISO 7854 B	>100000 cycles	Class 6
Trapezoidal Tear	ISO 9073-4	45 N / 26 N	Class 2
Tensile strength	ISO 13934-1	100 N / 55 N	Class 1
Puncture resistance	EN863	14 N	Class 2

FABRIC RESISTANCE TO PENETRATION BY LIQUIDS EN ISO 6530

Fabric Chemical Properties	Penetration	Repellency
Sulphuric Acid 30%	Class 3	Class 3
Sodium Hydroxide 10%	Class 3	Class 3
O-Xylène	Class 3	Class 2
Butan-1-ol	Class 3	Class 3

CATEGORY 3 TYPE PB: PARTIAL BODY

Dry particles Type PB 5 Method as defined by EN ISO 13982-1:2004 + A1:2010	Pass
Light splashes Type PB 6 Method as defined by EN 13034: 2005 +A1: 2009	Pass
Barrier to infective agents EN14126	Pass
Protection factor according to EN 1073-2:2002	Class 1
Surface resistivity EN 1149-5	Pass 2 faces

CATEGORY 3 TYPE PB: PARTIAL BODY

Dry particles Type PB 5 Method as defined by EN ISO 13982-1:2004 + A1:2010	Pass
Light splashes Type PB 6 Method as defined by EN 13034: 2005 +A1: 2009	Pass
Barrier to infective agents EN14126	Pass
Protection factor according to EN 1073-2:2002	Class 1
Surface resistivity EN 1149-5 .	Pass 2 faces

CHART SIZE

Height	Lenght sole	Widht sole	Top open	WeeSafe reference
48 CM	34 CM	12 CM	28 CM	WL-CBE/NAD-00

PACKAGING

	Units	Weight	Size	Volume
Carton	300	12 KG	48 X 32 X 50 CM	0,079 ^{M3}
Pallet	8 000	320	80 X 120 CM	1.40 ^{M3}

GENCOD : 3701012801339

CUSTOM CODE : 6210109800

**WeeSafe – 1 rue du Centre « Immeuble le Fujy » - 93160 Noisy le Grand Tél : + 33 (0)1 43 09 98 04
Courriel : contact@weesafe.fr**

